


# WOODKEEPER

## Fill-O-Dent & Wood Stainer

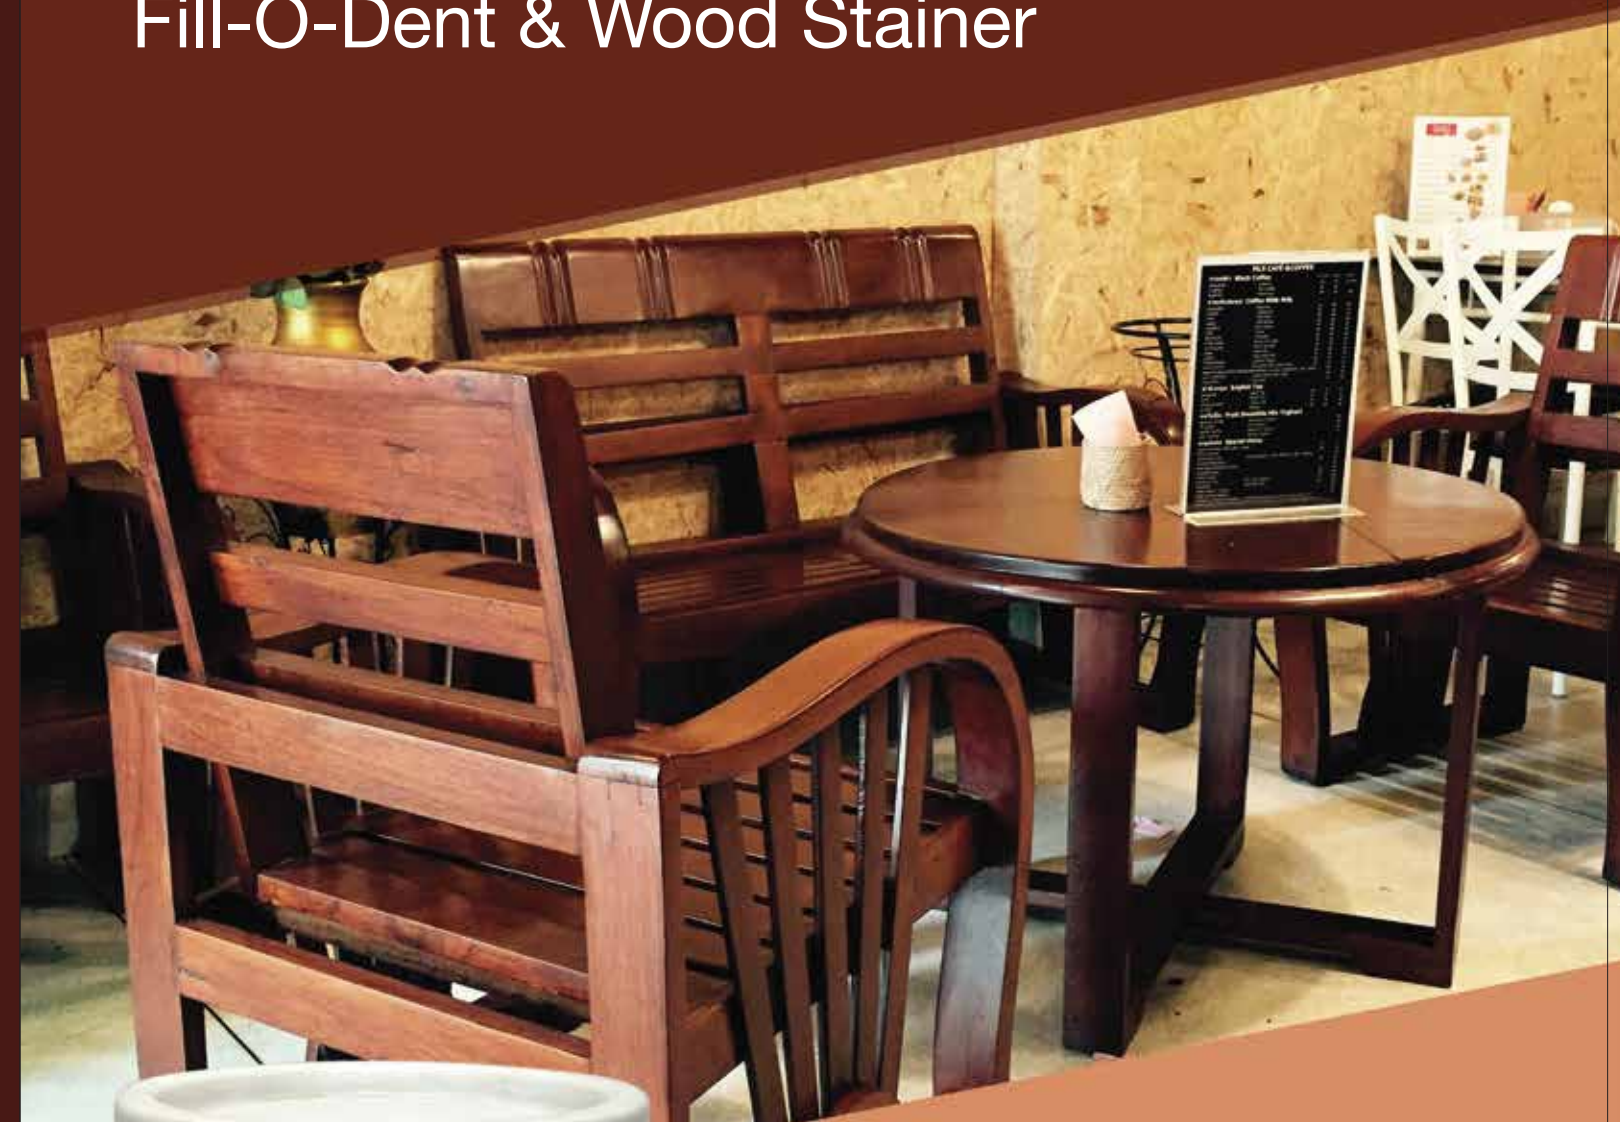

### Product Description :

- Fill-O-Dent : Plugs dents and nail holes
- Wood Stainer : Gives ordinary wood an excellent look by changing its tone. Both uniform and rich concentrated finish can be done

### USP :

Fill-O-Dent (K80)

- Meant for interior and exterior usage
- Can be tinted with Berger Wood Stainer to obtain shades of your choice
- Can also be used as filler by dilution (@5% - 10%)

Wood Stainer (FC4)

- Available in aluminium bottle with no leaks and zero loss
- Excellent colour strength

### BERGER PAINTS INDIA LIMITED

Berger House, 129 Park Street, Kolkata 700 017  
 CONSUMER RELATIONS MANAGER Ph: 1800-103-6030  
 Fax: 91-33-2249-9729/9009

Email: [consumerfeedback@bergerindia.com](mailto:consumerfeedback@bergerindia.com) | [www.bergerpaints.com](http://www.bergerpaints.com)



## WOODKEEPER Fill-O-Dent

**Product Description :** WoodKeeper Fill-O-Dent is a high-performance water-based wood putty which can be used to fill imperfections such as holes, dents and scratches.

**USP :** It is a water-based dent filler with excellent filling properties. The product has very good gloss hold out property and can be used both in the interiors and on the exteriors. The product can be tinted with solvent based WoodKeeper Wood Stainer to impart more shades.

Currently, WoodKeeper Fill-O-Dent has shades such as Teak, Walnut, Dark Walnut and White. However by adding Berger WoodKeeper Wood Stainer to it, more shades can be obtained.


### Application Procedure

**Sanding –** Sand the wooden substrate with Water Paper No.120 followed by Water Paper No.150.

**Application –** Apply WoodKeeper Fill-O-Dent on the clean surface to plug holes and dents. Allow the dent filler to dry for about 2 hrs. Small putty knife is usually used.

**Sanding & Re-coating –** Sand the filled dent with Water Paper No.180 followed by Water Paper No. 220. Apply another coat of WoodKeeper Fill-O-Dent if necessary, followed by the same sanding procedure that was done after the 1<sup>st</sup> coat.

**Application of Sealer –** The substrate is ready for sealer application.

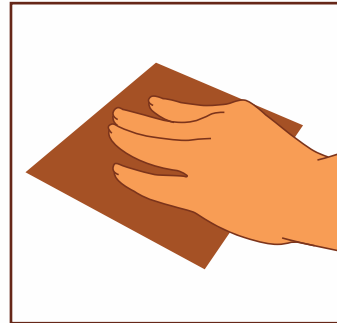

### Technical Data

Viscosity in poise	175±15
Specific Gravity gm/L	1.85±0.05
Surface Dry	Less than 45 mins
Sanding Time	Less than 1.5 hrs
Flash point	Above 4°C( Abel Closed Cup )
Fire Hazard Class	Flammable

### Product Information

1 Storage	Store in a cool and dry place. Keep away from the source of ignition. Keep the container tightly closed, out of the reach of children and away from foodstuff.	2 Pack size	500 ml, 1 L, 4 L
			3 Disposal



## WOODKEEPER Wood Stainer

**Product Description :** For the first time, Berger Wood Stainer has been launched for the Indian market. Each stainer comes in individual aluminium bottles which ensure zero loss of the product from the containers. Currently there are seven shades available in the market. They are: Walnut, Teak, Mahogany, Charcoal or Ebony Black, Oak Yellow, Rosewood and Red Brown.



**USP :** The product has high colour strength with brilliant transparency. The metal packing offers zero loss and leakage.

### Application Procedure :

1. Application of Wood Stainer is usually done by cloth on raw wood/veneer.
2. The cloth is soaked in the Wood Stainer and applied over the wooden substrate, passes after passes to obtain the desired colour strength.
3. Wood Stainer has fast drying solvents, so they dry very quickly and after that sealer application can be initiated.

